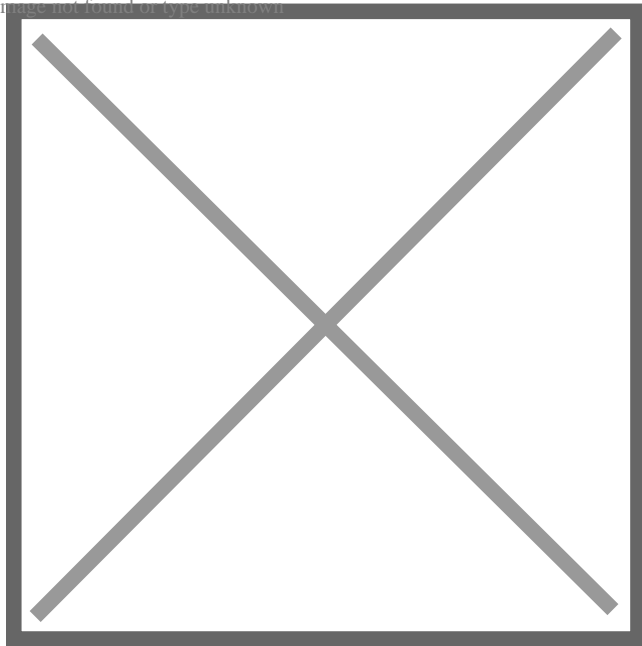


Image not found or type unknown




---

**Dimensions**


---

Product dimensions (mm)	630 x 575 x 80
-------------------------	----------------

---



---

**Scheme**

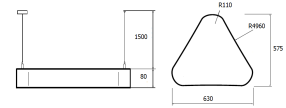

---



---

**Scheme**


---




---

**Product**


---

Real power (W)	55
Real luminous flux (Lm)	3603
Luminous efficiency (Lm/W)	65,5
Beam angle (°)	115
Life time (h)	60000 (L80B10)
IP	20
IK	04
Electrical class insulation	Class 1
Photobiological risk	0 - Exempt
Operating temperature	from 5° C to 30° C
Electrical feeding	220..240V, 50/60Hz
Colour	White
Energy efficiency class	A
Diffuser	PMMA opal diffuser

---



---

**Control gear**


---

Control gear included	Yes
Control gear	Electronic Control Gear
Factor de potencia	95

---



---

**Light source**


---

Light source included	Yes
Light source	Led
Nominal power (W)	52,5
Nominal luminous flux (Lm)	6930
Average life time (h)	60000
Colour temperature (K)	4000
Colour consistency (SDCM)	2
CRI	80

---



---

## Modern architectural luminaire designed with pure aesthetic triangular lines from the Artshape Troll family.

---

**DESCRIPTION**

Modern architectural luminaire designed with pure aesthetic triangular lines from the Artshape Troll family. Luminaire has been designed to be suspended (1,5 m suspension included). It build-in highly efficient LED light sources. Luminaire offers various options of luminous flux and colour temperature are available under request. Artshape allow achieve a unique arrangement of various premises and are thought to be used in spaces with high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. Body is made of thin-walled aluminium profile finish in white. However other different finishes are possible according to RAL colour range. Emitting Surface is made of material with very good light diffusion parameters. Luminaire sets a 52,5 W LED source with CRI higher than 85 % and a chromatic dispersion lower than 2 SMCD. Fixture has a luminous flux of 3603 Lm, with an efficiency of 65,5 Lm/W and a total consumption of 55 W. The average life for the luminaire is 60000 (L80B10) h (established at a minimum flux of 70 % from the original). Luminaire built-in an auxiliary gear on/off fed at 220-240V; 50/60 Hz.

Item code	0STSPE60W219Z
Product type	IN
Category	Architectural
Family	Artshape
Subfamily	Artshape Three
Materials	Body is made of thin-walled aluminium profile finish in white. However other different finishes are possible according to RAL colour range.
Optical system	Artshape build-in highly efficient LED light sources. Luminaire offers various options of luminous flux and colour temperature are available under request. Emitting Surface is made of material with very good light diffusion parameters.
Installation instructions	Luminaire has been designed to be suspended (1,5 m suspension set included). Versions for ceiling surface installation are possible on demand.

---

Pictograms

