
### LUMBO - LUMBO

Item code 11.1426.1341.63

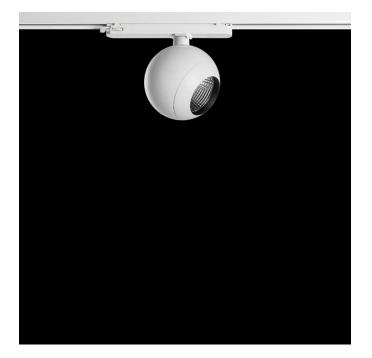

# Spherical spotlight from the TROLL family Lumbo.

#### DESCRIPTION


Spherical spotlight from the TROLL family Lumbo setting an advanced and innovative thermal balance system through passive dissipation with stable colour temperature of  $3000^\circ$  K (warm white) optimized to be used as general & accent lighting for commercial areas shop-windows and different indoor spaces. Designed for Installation on the TROLL triphasic track. Body built in Die-cast aluminium painted in ceramic white. Luminaire built-in an reflector made of high high vacuum aluminised policarbonate with an angle beam of  $40^\circ$ . Luminaire sets a 12 W LED source with CRI higher than 90 % and a chromatic dispersion lower than 3 SDCM. Luminaire sets a ball joint system which allows rotation  $355^\circ$  and tilting  $90^\circ$ . Fixture has a luminous flux of 1463 Lm, with an efficiency of 98,2 Lm/W and a total consumption of 15 W. The average life for the luminaire is 50000 h (established at a minimum flux of 70 % from the original). Luminaire built-in an auxiliary gear ON/OF fed at 220-240V; 50/60 Hz hidden into the track adapter.

Item code	11.1426.1341.63
Product type	IN
Category	Tracklights
Family	Lumbo
Subfamily	Lumbo
Materials	Body built in Die-cast aluminium.
Optical system	Luminaire built-in an reflector made of high high vacuum aluminised policarbonate.
Installation instructions	Luminaire designed for Installation on the TROLL triphasic track.
Pictograms	

Product dimensions (mm)	ø120 x 148
Packing dimensions (mm)	270 x 145 x 120
Net weight (g)	1010
Gross weight (Kg)	1,200

#### Scheme

Scheme



Product		
Real power (W)	15	
Real luminous flux (Lm)	1463	
Luminous efficiency (Lm/W)	98,2	
Beam angle (°)	40	
Life time (h)	50000	
IP	20	
Electrical class insulation	Class 1	
Operating temperature	from -20°C to 35°C	
Electrical feeding	220240V, 50/60Hz	
Colour	Ceramic white	
Energy efficiency class	<b>A</b> +	

Control gear		
Control gear included	Yes	
Control gear	Electronic Control Gear	
Factor de potencia	0,98	

Light source		
Light source included	Yes	
Light source	Led	
Nominal power (W)	12	
Nominal luminous flux (Lm)	1568	
Average life time (h)	50000	
Colour temperature (K)	3000	
Current (mA)	350	
Colour consistency (SDCM)	3	
CRI	90	

Photometry


tr●ll®

# LUXIONA

## Item code 11.1426.1341.63

# tr**●**||\*

Photometry



Accesories

11.1426.0001.04

Honeycomb antiglaring accessory for Lumbo spotlight.