ZAS - MN ZAS CARDAN

Item code 11.1518.2842.21

Dimensions

Net weight (g)

Scheme Scheme

Drilling hole (mm)

Product dimensions (mm)

Packing dimensions (mm)

tr●	•

38


125

125

125 x 125 x 134 135 x 135 x 144

1423

110 x 110

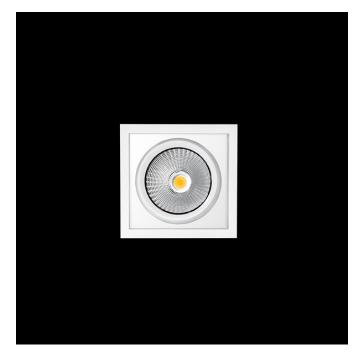

Single head square downlight with small format from the TROLL family Mini Zas Cardan.

DESCRIPTION

Single head square downlight with small format from the TROLL family Mini Zas Cardan setting an advanced and innovative thermal balance system through passive dissipation with stable colour temperature of 4000° K (neutral white) optimised to be used as general indoor lighting for offices, hospitals commercial areas or residential & contract spaces. Designed for ceiling recessed installation. Luminaire body made from Lacquered stainless steel sheet with headlights and heat-sinks built in die cast aluminium finished in grey. Luminaire is IP20. Luminaire built-in an head setting faceted reflector made in high purity aluminium with an angle beam of 40°. Luminaire sets a 25 W LED source with CRI higher than 85 % and a chromatic dispersion lower than 3 SMCD. Luminaire sets a ball joint system which allows 25° in both cardanic axels. Fixture has a luminous flux of 2200 Lm, with an efficiency of 75,9 Lm/W and a total consumption of 29 W. The average life for the luminaire is 50000 h (stabilised at a minimum flux of 70 % from the original). Luminaire built-in an auxiliary gear ON/OF fed at 220-240V; 50/60 Hz.

Item code	11.1518.2842.21	
Product type	IN	
Category	Recessed Downlights	
Family	Zas	
Subfamily	Mn Zas Cardan	
Materials	Luminaire body made from Lacquered stainless steel sheet with headlights and heat-sinks built in die cast aluminium.	
Optical system	Luminaire built-in a head setting faceted reflector made in high purity aluminium.	
Installation instructions	Luminaire designed for ceiling recessed installation.	
Pictograms	(€ 🔲 💷	

Product		
Real power (W)	29	
Real luminous flux (Lm)	2200	
Luminous efficiency (Lm/W)	75,9	
Beam angle (°)	40	
Life time (h)	50000	
IP	20	
Electrical class insulation	Class 2	
Operating temperature	from -20°C to 35°C	
Electrical feeding	220240V, 50/60Hz	
Colour	Grey	
Energy efficiency class	Α	

Control gear		
Control gear included	Yes	
Control gear	Electronic Control Gear	
Factor de potencia	0,99	

Light source		
Light source included	Yes	
Light source	Led	
Nominal power (W)	25	
Nominal luminous flux (Lm)	3500	
Average life time (h)	50000	
Colour temperature (K)	4000	
Colour consistency (SDCM)	3	
CRI	80	

Photometry

LUXIONA

ZAS - MN ZAS CARDAN

Item code 11.1518.2842.21

tr**●ll**®



