
Item code 11.1693.1832.20



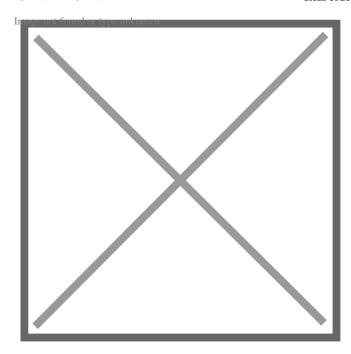

1	[ineal	linground	luminaire	from the	TROLL	family Canal.	
	Lilleal	i iliyroulid	i iuiiiiiiaire	irom me	INVLL	raiiiiiv Canai.	

DESCRIPTION

Lineal inground luminaire from the TROLL family Canal setting an advanced and innovative thermal balance system through passive dissipation with stable colour temperature of 3000° K (warm white) optimised to be used as Indoor or outdoor lighting of high heights spaces and structures. Designed for inground installation. Body built in diehigh heights spaces and structures. Designed for inground installation. Body built in diecast aluminium with the frontal made of tempered glass and stainless steel finished in Polish steel. Luminaire is IP65. Luminaire built-in an independent lens system for each led with an angle beam of 42°. Luminaire sets a 9W W LED source with CRI higher than 80 % and a chromatic dispersion lower than 3 SMCD. Fixture has a luminous flux of 340 Lm, with an efficiency of 34,3 Lm/W and a total consumption of 9,9 W. The average life for the luminaire is 500000 h (stabilised at a minimum flux of 70 % from the original). Luminaire built-in an auxiliary gear ON/OF fed at 220-240V; 50/60 Hz.

Item code	11.1693.1832.20	
Product type	OUT	
Category	Recessed	
Family	Canal	
Subfamily	Canal	
Materials	Body built in die-cast aluminium with the frontal made of tempered glass and stainless steel.	
Optical system	Luminaire built-in an independent lens system for each led.	
Installation instructions	Luminaire designed for inground installation.	
Pictograms	ha a ce ha ha fa gush a dha fa gush ha a k finan wak na k	

h	Defende	Distinante	hootkfogowduoiktyepeninknowi
ŧ.,	THE PHENSOLITHIN	Intractional States	

Dimensions		
Product dimensions (mm)	110 x 402 x 86	
Net weight (g)	2150	

Net weight (g)	2150
Scheme	
Scheme	mage not found or type unknown

Product		
Real power (W)	9,9	
Real luminous flux (Lm)	340	
Luminous efficiency (Lm/W)	34,3	
Beam angle (°)	42	
Life time (h)	50000	
IP	67	
IK	8	
Electrical class insulation	Class 1	
Operating temperature	from -15°C to 35°C	
Electrical feeding	220240V, 50/60Hz	
Colour	Stainless steel	

Control gear		
Control gear included	Yes	
Control gear	Electronic Control Gear	
Factor de potencia	0,99	

Light source		
Light source included	Yes	
Light source	Led	
Nominal power (W)	9	
Nominal luminous flux (Lm)	450	
Colour temperature (K)	3000	
CRI	80	